Gas Control Panel

Model: KB2160

Brief Introduction

KB2160 is a single-point gas control panel. Each channel can connect with 1pc of 4-20mA gas detector. With on-site audible and visual alarming signals, it's very obvious for the users to know the gas leakage details in the working place.

Specifications

-Power supply: AC 220V±33V or DC24V±25%
-Consumption: ⩽10W
-Output voltage: DC 24V±6V
-Ingress protection: IP54
-Working temperature: -10℃～50℃
-Working humidity: ⩽95%RH
-Indication: LED lights and LCD screen
Different alarm signals for gas leak, fault etc.
-Audible alarm: 65dB--115dB at 1 meter
-Relay output: passive output
-Cable required:RVVP 1.5 mm²×3 core cable
-Installation method: wall mounting type or cabinet type
wall mounting type for 2,4,6 & 8 channels together.
cabinet type for 10 channels together

HAUSNET

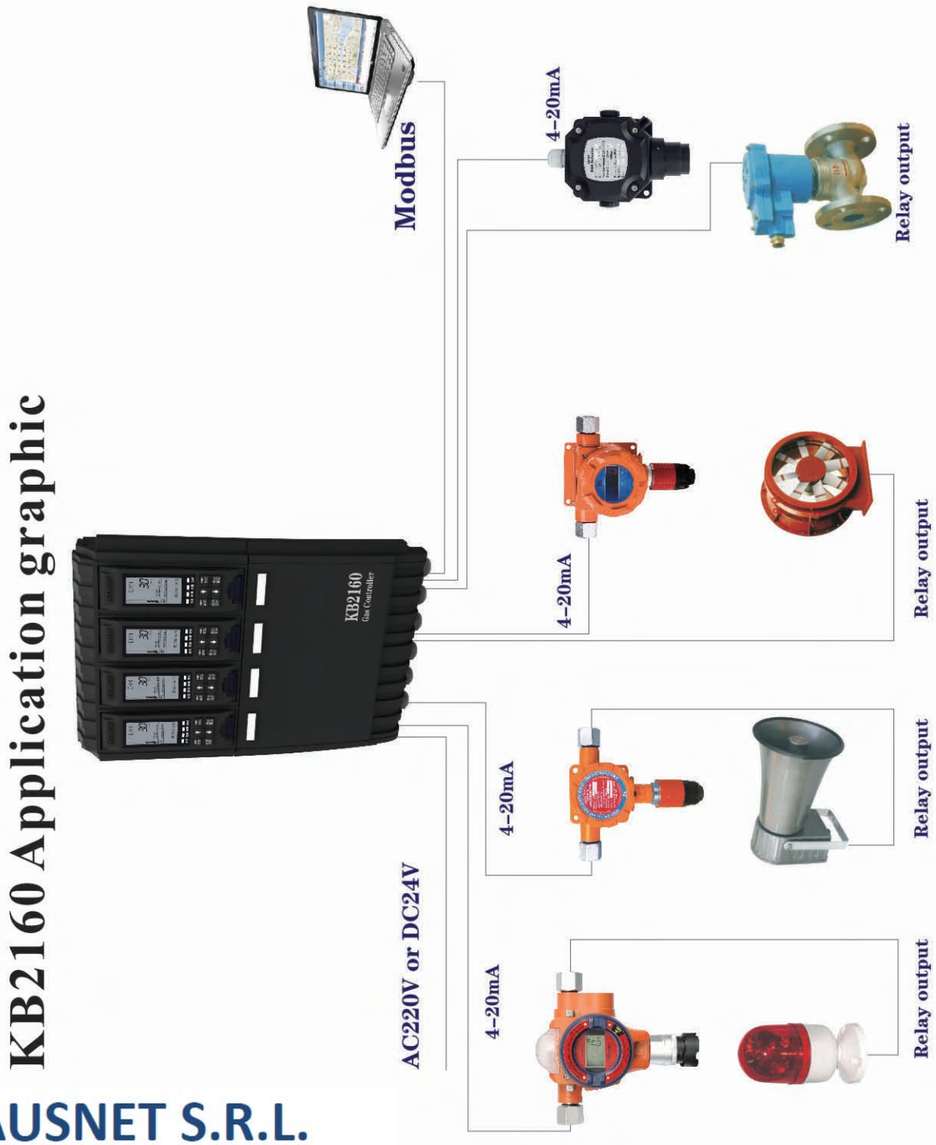

HAUSNET S.R.L.
Tel Argentina: (+54-11) 5219-2211
Tel Chile: (+56-2) 2897-3999
E-Mail: hausnet@hausnet.com.ar
Web: www.hausnet.com.ar